

# **Wrong PSV Found Installed in Field**

**Lessons Learned**

**Volume 04 Issue 12**

**© 2004 USW**


## Wrong PSV Found Installed in Field

### Purpose

---

To conduct a small group “lessons learned” activity to share information gained from incident investigations.

To understand “lessons learned” through a systems of safety viewpoint.

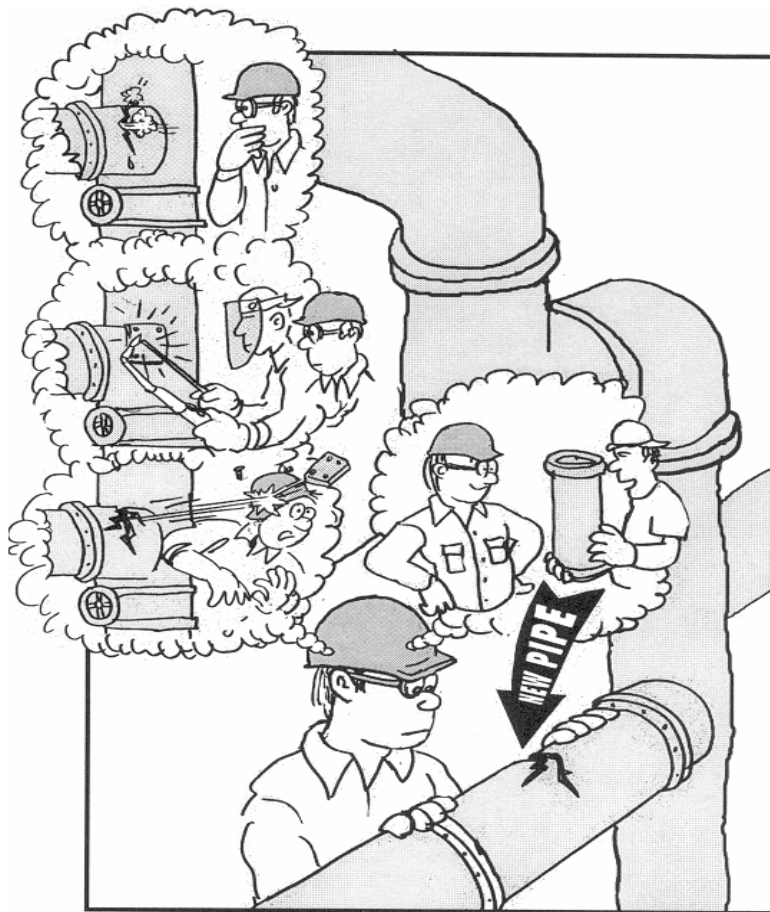

This material was produced by The Labor Institute and USW under grant number 46DO-HT11 Susan Harwood Training Grant Program, from the Occupational Safety and Health Administration, U.S. Department of Labor. It does not necessarily reflect the views or policies of the U.S. Department of Labor, nor does mention of trade names, commercial products or organizations imply endorsement by the U.S. Government.

The incident and recommendations made are from an actual USW represented facility. These recommendations are a product of the site’s analysis of the incident and not meant to represent the USW official view on the topic(s). In fact, one of the goals of this exercise is evaluate the recommendations made and to suggest improvements.

## ***Introduction***

### **One Hour “Lessons Learned” Safety Training Activity**

This is a Small Group Activity Method (SGAM) exercise. It is designed for use in toolbox style meetings where a group of craft persons, operators, or other small group is assembled for a safety training session. The whole group should be further divided into smaller discussion groups of four to six people.

The tone of the meetings should be informal to create as much discussion as possible within the groups and among the groups. Active participation by group members is essential for this exercise to be successful.

If you plan to present a Lessons Learned Activity and have not been trained in the USW worker trainer program, you should contact the USW Health, Safety & Environment Department:

Phone (412) 562-2581

email: [safety@steelworkers-usw.org](mailto:safety@steelworkers-usw.org) for trainer information.

For this exercise, each person in the group should have their own copy of this activity printed in its entirety. The exercise consists of three tasks. Each task is designed to provoke thought and generate discussion about the incident at hand. Each discussion group should designate a scribe to keep notes and report back to the facilitator and class after each task. When the exercise is completed, review the Summary on page 13.

Definitions of terms used in this exercise are provided throughout the activity. A glossary of terms is also provided in the appendix.

The incident(s) depicted in this activity are based upon real occurrences. The names of persons and corporations are fictitious.

## Task 1

---

**Please read the following scenario:**

This was supposed to be a routine maintenance procedure. This Pressure Safety Valve (PSV) has what is called a rotating spare so that the process is not interrupted when the PSV has to have its yearly maintenance performed. The spare PSV is prepared and the in-service one is pulled and the spare installed in its place.

A rotating spare was prepared by the Main Shop and sent to the unit to be installed. Prior to the PSV being installed, the Field Mechanic noticed that the set pressure on the PSV inspection tag (375psig) exceeded the maximum allowable pressure for the vessel. He compared the tag to the one on the PSV currently in service, which was 110psig. He notified his supervisor and the PSV was returned to the Main Shop and a near miss form was filled out. The Main Shop investigated the discrepancy and set another PSV to the correct pressure (110psig) and sent it out to the unit to be installed. The PSV was installed in the field and the old PSV was pulled and sent to the Main Shop for testing. It was tested and relieved at 375psig. It had been in 110psig service for 9 months.

**Pertinent Facts:**

- PSV with wrong set point in service for 9 months
- Shop no longer uses a double check because of high work load
- Only 2 men were in shop on when the valve was initially tested
- 11 PSVs came through shop on that day along with other work
- PSV work was scheduled early because of the startup of an idled unit
- 3 PSVs in the warehouse have the same stock number but different set pressures
- Typo error by SAP data entry group
- 1,916 relief valves went through the shop last year

## **Task 1** *(continued)*

---


**On the next page you will find a logic tree that shows how the investigators at this site linked the incident that occurred (the top event) to the facts described in the scenario and the incident’s root causes. Below each root cause in the logic tree you will find a block with the title “SOS” (System of Safety).**

**Find the boxes marked SOS. Directly above those boxes will be a root cause of the incident. Your task is to complete the logic tree by identifying the *major* system of safety affected where the root cause failure occurred and list it in the box. These “systems” are listed in a chart on page 9. *Note: some of the SOS boxes may already be completed for you.***

**Please select someone in your group to act as scribe to report back your answers.**

*A USW “Lessons Learned” Activity*

A **Logic Tree** is a pictorial representation of a logical process that maps an incident from its occurrence to the root causes of the incident.

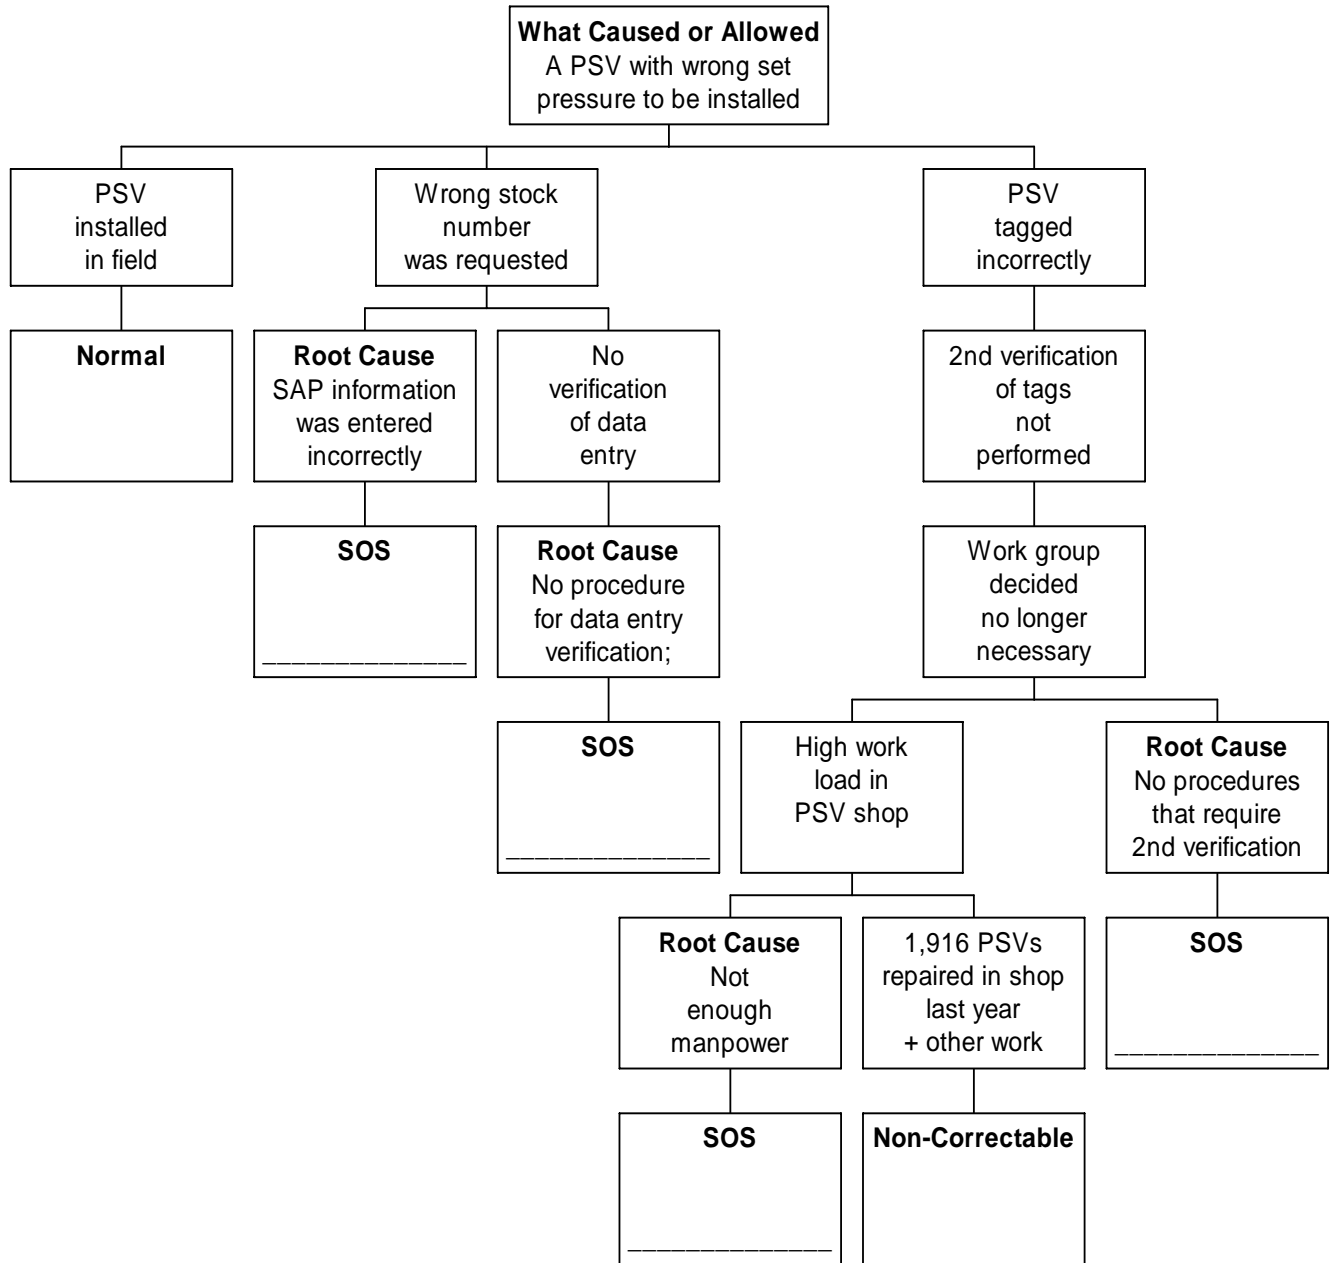

## Task 2

**A. Below you will find two lists. On the left are the root causes from the logic tree on the previous page. On the right are recommendations made by the team that investigated this incident. On the chart below identify which of the “recommendations” would eliminate or reduce each “root cause” by placing the number of the recommendation(s) on the line provided. More than one recommendation can apply to a root cause.**

	Root Causes	Recommendations
	A. Data entered into SAP incorrectly	1. Develop a sign off procedure for data entry into SAP.
	B. No verification of data entry	2. Schedule work in the shop according to the available manpower.
	C. Staffing shortage in Main Shop	3. Add another person in Main Shop and/or train more mechanics to work on PSVs during high work load periods
	D. Procedure in shop didn't require double checking PSVs before shipping them out	4. Revise PSV repair procedure to include a 2 <sup>nd</sup> person to check paperwork and tags.
		5. Communicate all revisions and new procedures to all affected personnel.
		6. Immediately correct SAP info on this PSV and check others.
		7. Shop planner to verify equipment no. on work order.
		8. Send out a Safety Bulletin

*A USW “Lessons Learned” Activity*

**B. Use the concepts found on the factsheets on pages 9 through 12 and evaluate the recommendations from Question A. How would you strengthen or add to the list?**



### **Task 3**

---

**Discuss ways in which the “Lessons Learned”(listed below) from this incident can be applied at your workplace. Please explain.**

#### **Lessons Learned**

- Having a 2<sup>nd</sup> person verify the information on the tags and work orders was developed for a reason. The work group should not skip this step just because of an excessive workload.
- We are all human. Typos happen. That is another reason to double check the data entry.
- It is imperative to adequately staff all jobs.
- Auditing of systems and procedures should be done on a regular basis.
- Everyone should know that an MOC is required to change procedures in order to evaluate any hazards or risks.

---

---

---

---

---

---

---

---



## All Systems of Safety Are Not Created Equal!




Surprisingly, the same hazard can often be addressed in more than one system. Take the low pipe in the doorway above, on the next two pages you'll see how this same problem could be handled by each of the major Systems of Safety.

Which is the best approach? Well, if you look at the Systems of Safety Chart on the previous page, you will find the SOS's arranged in order of strength: the most powerful – Design – on down to the least powerful – Personal Protective Factors.


A good investigation team will consider the full range of recommendations for each root cause.

A USW "Lessons Learned" Activity

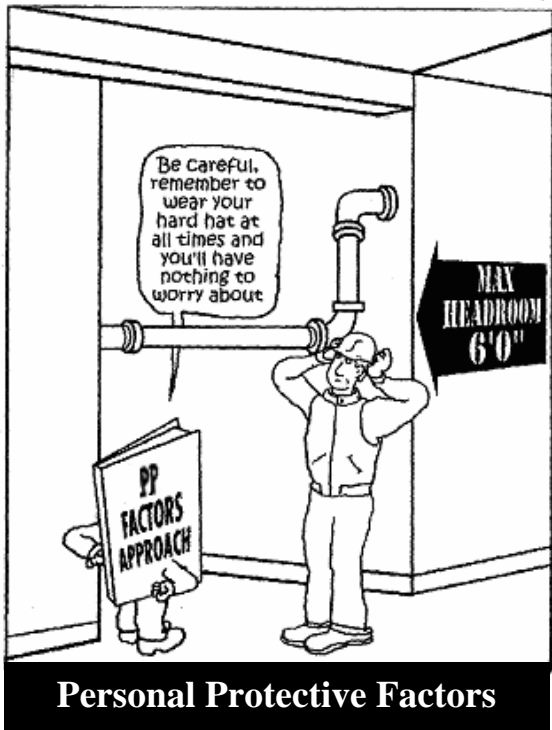


Sub-systems that include a broad range of working conditions and situations that affect workers.

- Weakest system
- Controls the hazard directly at the individual's level

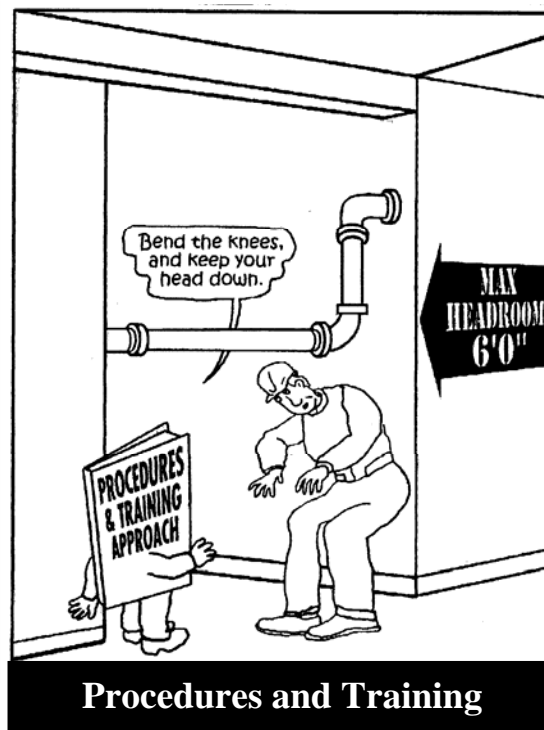

The instructions and knowledge necessary to maintain and operate equipment or processes

- Easier to affect groups of workers.
- Dependent on individuals' memories and lack of distraction

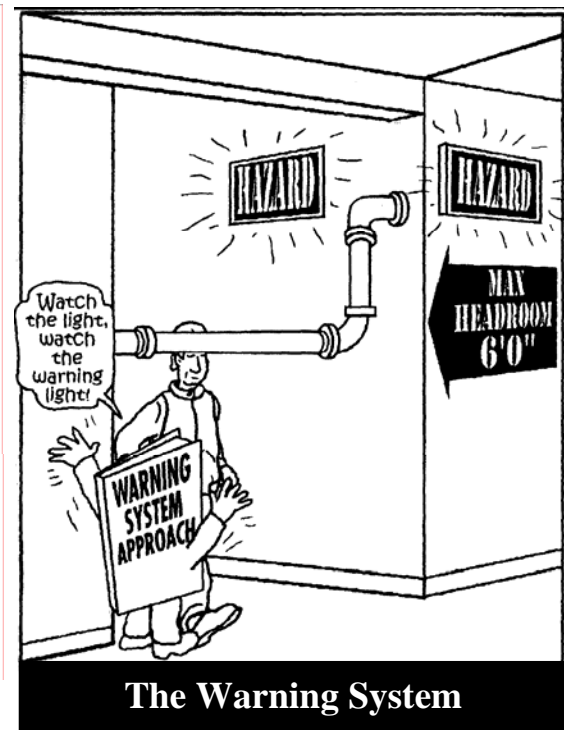

Devices that warn of a dangerous or potentially dangerous situation.

- Draws attention
- May be missed or ignored

A USW "Lessons Learned" Activity



Sub-systems that automatically act to control or reduce the effect of hazards.

- Workers protected automatically

The system responsible for maintaining, repairing and inspecting equipment and processes.

- Vital to make sure even the best designed system continues to function safely

The primary (highest level) system that designs the hazard out of the process.

- Strongest system
- Hazard eliminated

## **Summary: Lessons Learned**

1. The objective of “lessons learned” is to prevent accidents through identifying and correcting underlying defects in systems of safety. To achieve maximum prevention, all recommended changes should be made.
2. Corrective action resulting from lessons learned is one of the best methods for achieving proactive health and safety. Maximum prevention is achieved by correcting the conditions that led to the incident at other sites in the plant and at other sites.
3. Systems of safety-based analysis help identify the underlying causes of incidents and are valuable for determining what corrective measures should be taken as a result of the lessons learned.
4. Many times the result of an incident investigation is that worker error is identified as the main contributing factor. When a systems of safety-based analysis is used, multiple root causes are usually uncovered.
5. The most effective controls of health and safety hazards are those which are integrated or designed into the process, such as engineering controls. The least effective controls involve personal protective equipment and procedures that merely acknowledge the hazard and do nothing to eliminate it.
6. All work-related hazards must be evaluated before work begins to eliminate or reduce worker exposure to hazards and to prevent injuries.

## Glossary of Terms (Appendix)

Several unique terms are used while doing the “Lessons Learned” exercises. Their definitions are listed below.

**Contributing Factor**—something that actively contributes to the production of a result, an ingredient.

**Fact**—a piece of information presented as having objective reality, an actual occurrence or event.

**Hierarchy of Systems of Safety**—the ranking of systems of safety as to their relative effectiveness in providing accident prevention. This hierarchy is represented by the “Fulcrum” with the most effective system of safety residing on the left side of the lever. Less effective systems reside further to the right on the lever.

**Lessons Learned**—A summation of an investigation that describes safety hazards or conditions with general educational recommendations to identify and correct similar conditions. These differ from investigation recommendations as illustrated below:

*Investigation recommendation:* Replace the carbon steel gate valve on the vacuum tower bottoms line with a chrome valve. The valve failed due to corrosion.

*Lessons Learned:* Verify that carbon steel valves and piping are not used in vacuum tower bottoms service because corrosion can cause them to fail.

**Logic Tree**—a pictorial representation of a logical process that maps an incident from its occurrence to the root causes of the incident.

**Recommendations**—calls for specific changes that address each root cause of an incident or accident to prevent its reoccurrence.

**Root Cause**—basic cause of an accident found in management safety systems.

**Glossary of Terms** (*continued*)

**Supports and Barriers**—“supports” are conditions that promote or render assistance to implementing recommendations while “barriers” are conditions that obstruct the implementation of recommendations.

**Systems of Safety**—management systems that actively seek to identify and control hazards before they result in an incident or injury.

- Design and Engineering
- Maintenance & Inspection
- Mitigation Devices
- Warning Systems
- Procedures and Training
- Personal Protective Factors



### Conducting a “Lessons Learned” Activity

Circle the number that best shows your response to each of the following questions.

1. How easy was it for you to understand the “systems of safety” approach presented in this activity?

<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>
<b>Very easy</b>	<b>Somewhat easy</b>	<b>Somewhat hard</b>	<b>Very hard</b>

2. How useful do you think this “systems of safety” way of thinking could be for tackling safety and health problems at your workplace?

<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>
<b>Very useful</b>	<b>Somewhat useful</b>	<b>Not very useful</b>	<b>Of no use</b>

3. How much do you agree or disagree with the following statement:

The logic tree diagram approach can be helpful for analyzing the root causes of safety and health incidents.

<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>
<b>Strongly agree</b>	<b>Agree</b>	<b>Disagree</b>	<b>Strongly disagree</b>

4. Overall, how useful was this “lessons learned activity” for considering safety and health problems at your workplace?

<b>4</b>	<b>3</b>	<b>2</b>	<b>1</b>
<b>Very useful</b>	<b>Somewhat useful</b>	<b>Not very useful</b>	<b>Of no use</b>